



# FTD9-150 90

## Drilling and Tapping Unit

### FTD9-150 Drilling Section

#### ■ Specification

Hydraulic Pressure	25~35kg/cm <sup>2</sup>
Drilling Capacity	φ 35(mild steel)
Flow Control Valve	FCC-G03-8
Max. Revolution/Minute	2,000rpm
Stroke	150mm
Cylinder Diameter	φ 63
Transmission	*B2-DP φ 139 *HTD-8YU-56T

#### ■ Consumption Parts

Spindle Bearing	33010x1, 32008x1, 6010Zx1, 6008Zx1
Pulley Bearing	6013Zx1, 51213x1


### FTD9-90 Tapping Section

#### ■ Specification

Tapping Capacity	M45(mild steel)
Stroke	90mm
Thread Pitch	0.8mm~3.0mm
Gauge Lubrication	Grease
Transmission	*RS40-2 row-30T *HTD-8YU-48T

#### ■ Consumption Parts

Spindle Bearing	6010Zx4
Pulley Bearing	6212Zx1, 6212ZZx1

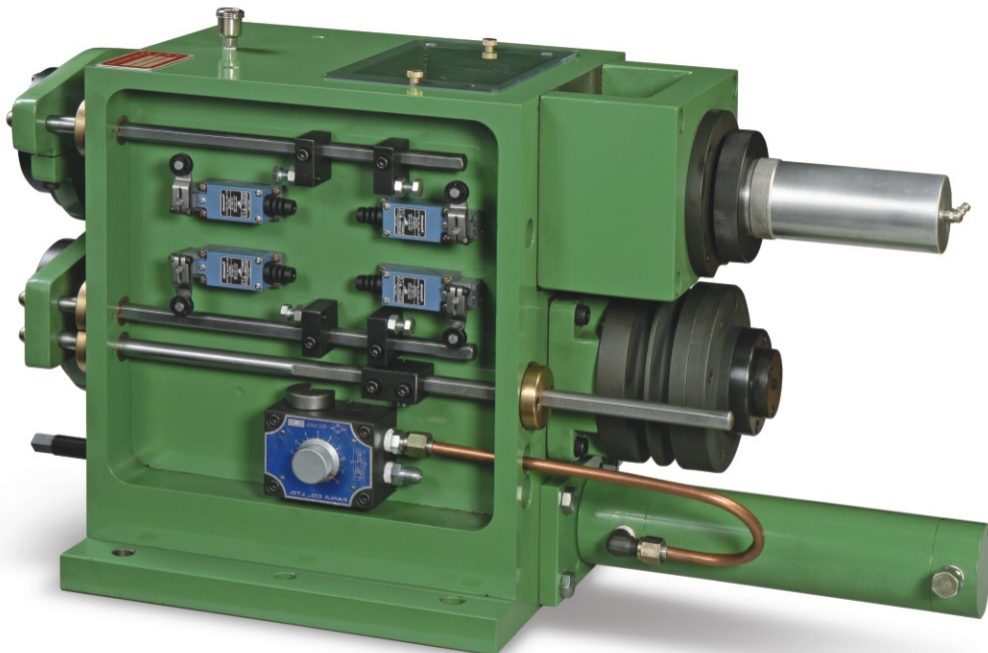

Weight : 231kg

